


A1-A4.

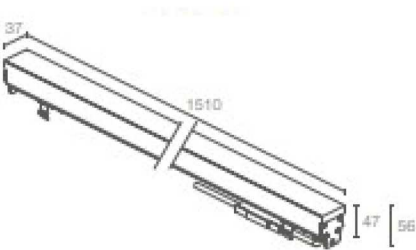

29W 24Vdc white light 1510 mm  
26W 24Vdc RGB light 1510 mm  
**RE2300** **D B**

**F** - 2600K  
**5** - 2800K  
**9** - 3700K  
**6** - RGB

diffuse

3168 lm (2800K)  
RGB: 420 lm, R: 90 lm G: 270 lm B: 60 lm

870 lm (2800K)  
RGB: 300 lm, R: 66 lm G: 192 lm B: 42 lm

288 SMD low-power LEDs  
RGB: SDM full-colour LEDs

body in PMMA  
screen in opal PMMA  
end caps in AISI 316L stainless steel


not included, see p. 298

includes 1.5 m neoprene cable H05RN-F  
2x0.35/0.75 Ø6.3 mm  
RGB: includes 1.5 m FEP+PCP cable  
(equivalent to H05RN-F) 4x0.50/0.50 Ø6.3 mm

recessed (ceiling, wall, ground)

see p. 298

underwater version Rio Sub 2, p. 327  
non-standard lengths available on request

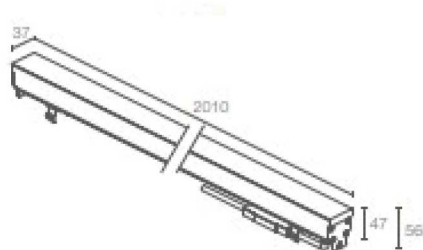

38W 24Vdc white light 2010 mm  
34W 24Vdc RGB light 2010 mm  
**RE2400** **D B**

**F** - 2600K  
**5** - 2800K  
**9** - 3700K  
**6** - RGB

diffuse

4224 lm (2800K)  
RGB: 560 lm, R: 120 lm G: 360 lm B: 80 lm

1160 lm (2800K)  
RGB: 400 lm, R: 88 lm G: 256 lm B: 56 lm

384 SMD low-power LEDs  
RGB: SDM full-colour LEDs

body in PMMA  
screen in opal PMMA  
end caps in AISI 316L stainless steel

not included, see p. 298

includes 1.5 m neoprene cable H05RN-F  
2x0.35/0.75 Ø6.3 mm  
RGB: includes 1.5 m FEP+PCP cable  
(equivalent to H05RN-F) 4x0.50/0.50 Ø6.3 mm

recessed (ceiling, wall, ground)

see p. 298

underwater version Rio Sub 2, p. 327  
non-standard lengths available on request