


C4.



Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED
Painting: dust painted, using polyester epoxy paint to withstand UV rays.
Standard supply: includes adjustable steel bracket.
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
Power factor: 0.9
Photobiological safety class: Exempt group.
Luminous flux maintenance 70%: 25.000h (L70B50).

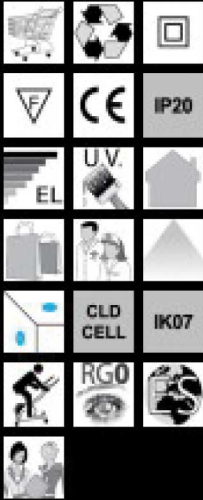