

PURCHASE CONTRACT

smlouva č. *S15/195 E*

This purchase contract ("Contract") was concluded pursuant to section 2079 *et seq.* of the act no. 89/2012 Coll., Civil Code ("Civil Code"), on the day, month and year stated below by and between:

- (1) **Institute of Physics of the Academy of Sciences of the Czech Republic, a public research institution,**
with its registered office at:
Na Slovance 2, Praha 8, PSČ: 182 21,
registration no.: 68378271,
represented by: prof. Jan Řídký, DrSc. – director
("Buyer"); and
- (2) **OptiXs, s.r.o.,**
with its registered office at: Krivoklátská 37/3, Letňany, 199 00 Praha 9,
registration no.: 02016770,
represented by: Ing. Aleš Jandík, CEO
("Seller").

(The Buyer and the Seller are hereinafter jointly referred to as "**Parties**" and individually as "**Party**".)

WHEREAS

- (A) The Buyer is a public contracting authority and the beneficiary of a grant of the Ministry of Education, Youth and Sports of the Czech Republic for a project „*ELI: Extreme Light Infrastructure*“, registration number CZ.1.05/1.1.00/02.0061 ("**Project**"), within the Operational Programme Research and Development for Innovations, priority axis 1, objective 1.1 European Centers for Excellence.
- (B) For the successful realization of the Project it is necessary to purchase the Object of Purchase (as defined below) in accordance with the act no. 137/2006 Coll., on public procurement, and Rules for the Selection of Suppliers within the Operational Programme Research and Development for Innovations.
- (C) The Seller wishes to provide the Object of Purchase to the Buyer for consideration.
- (D) The Seller's bid for the public procurement entitled "*Optical and X-ray streak cameras for experimental areas*" (part no. 2 – *Infra-red streak camera system (IRSCS)*), which was published in the Journal of Public Procurement under the registration number 498368 and whose purpose was to procure the Object of Purchase ("**Public Procurement**"), was selected by the Buyer as the most suitable.

IT WAS AGREED AS FOLLOWS:

1. BASIC PROVISIONS

- 1.1 Under this Contract the Seller shall hand over to the Buyer streak camera system, which shall meet requirements listed in Annex 1 (*Technical Specification*) to this Contract (“**Object of Purchase**”) and shall transfer to the Buyer ownership right to the Object of Purchase, and the Buyer shall take over the Object of Purchase and shall pay the Seller the Purchase Price (as defined below), all under the terms and conditions stipulated in this Contract.
- 1.2 Under this Contract the Seller shall also carry out following activities (“**Related Activities**”):
- a) to test the Object of Purchase at the Seller’s premises to verify, whether the Object of Purchase fulfils all requirements stipulated in this Contract and prepare a protocol on such testing; the Seller shall inform the Buyer of the testing sufficiently in advance and shall allow the Buyer to be present during the testing;
 - b) to transport the Object of Purchase to the place of delivery;
 - c) to elaborate and hand over to the Buyer documents listed in Annex 1 (*Technical Specification*) to this Contract and other documents that are necessary for the proper takeover and use of the Object of Purchase in English language in electronic form;
 - d) to handover the declaration of conformity of the Object of Purchase with the approved standards, if there are any;
 - e) to elaborate a list of particular items of the Object of Purchase for the purposes of control;
 - f) cooperate with the Buyer during the performance of this Contract.
- 1.3 The Seller promises to the Buyer that if for the fulfillment of the requirements of the Buyer under this Contract or the proper operation of the Object of Purchase are necessary other deliveries and activities not mentioned in this Contract, the Seller shall procure such deliveries or shall carry out such activities at its own expense without any effect on the Purchase Price.
- 1.4 The Object of Purchase and all its subcomponents must be supplied new and unused.

2. THE PLACE OF DELIVERY

- 2.1 The place of delivery is the registered office of the Project in Dolní Břežany village, Central Bohemian Region.

3. THE TIME OF DELIVERY

- 3.1 The Seller shall deliver the Object of Purchase and shall carry out Related Activities within eighteen (18) months from the effectiveness of this Contract. Due to the potential delay of some activities within the Project during the performance of this Contract, the Buyer is entitled, anytime until the delivery to the place of delivery, to postpone the above mentioned terms of delivery by another six (6) months.

- 3.2 The Seller is entitled to handover the Object of Purchase and to carry out Related Activities during working days between 7:30 and 18:00 hours, unless otherwise agreed by the Parties. Exact working days shall be determined on the basis of mutual agreement. If the agreement is not reached, the Seller shall perform during the last day, on which it is possible to fulfill this Contract in time and the Buyer shall provide to the Seller for this purpose necessary cooperation.
- 3.3 Prior to the handover of the Object of Purchase and the execution of Related Activities the Seller shall invite the Buyer to control the premises for installation of the Object of Purchase in such a way that their readiness for installation of the Object of Purchase is secured (e.g. a control of the location of electricity points, etc.) and possible deficiencies preventing timely and proper installation and demonstration of the operation of the Object of Purchase are eliminated.

4. THE OWNERSHIP RIGHT

The ownership right to the Object of Purchase shall be transferred to the Buyer upon the signature of the Handover Protocol (as defined below) by both Parties.

5. PRICE AND PAYMENT TERMS

- 5.1 The purchase price for the Object of Purchase is 109 000,- EUR without value added tax ("VAT"), and with the VAT rate 21 % (if applicable in this case) is 131 890,- EUR ("**Purchase Price**").
- 5.2 The Purchase Price cannot be exceeded and includes all costs and expenses of the Seller related to the performance of this Contract. The Purchase Price includes, among others, all expenses related to the handover of the Object of Purchase and execution of Related Activities, costs of copyright, insurance, warranty service and any other costs and expenses connected with the performance of this Contract.
- 5.3 The Purchase Price for the Object of Purchase shall be paid in euro on the basis of a tax document – invoice, to the account of the Seller designated in the invoice. The Purchase Price shall be paid in the following manner:
- a) 50 % of the Purchase Price shall be paid after the signature of this Contract;
 - b) 25 % of the Purchase Price shall be paid after the successful testing of the Object of Purchase at the Seller's premises; and
 - c) 25 % of the Purchase Price shall be paid after the signature of the Handover Protocol. The copy of the Handover Protocol must be attached to the invoice.
- 5.4 The Buyer shall realize payments on the basis of duly issued invoices within 30 days from their receipt. The invoice shall be considered to be paid for on the day when the invoiced amount is deducted from the Buyer's account on behalf of the Seller's account.
- 5.5 The invoice issued by the Seller as a tax document must contain all information required by the applicable laws of the Czech Republic. Invoices issued by the Seller in accordance with this Contract shall contain in particular following information:
- a) name and registered office of the Buyer,

- b) tax identification number of the Buyer,
- c) name and registered office of the Seller,
- d) tax identification number of the Seller,
- e) registration number of the tax document,
- f) scope of the performance (including the reference to this Contract),
- g) the date of the issue of the tax document,
- h) the date of the fulfilment of the Contract,
- i) Purchase Price,
- j) registration number of this Contract, which the Buyer shall communicate to the Seller based on Seller's request before the issuance of the invoice,
- k) declaration that the performance of the Contract is for the purposes of a project "ELI: EXTREME LIGHT INFRASTRUCTURE", registr. number CZ.1.05/1.1.00/02.0061,

and must comply with the double tax avoidance agreements, if applicable.

- 5.6 In case that the invoice shall not contain the above mentioned information, the Buyer is entitled to return it to the Seller during its maturity period and this shall not be considered as a default. The new maturity period shall begin from the receipt of the supplemented or corrected invoice to the Buyer.
- 5.7 Last invoice of every calendar year must be delivered to the Buyer on December 15 of that calendar year, at the latest.

6. SELLER'S DUTIES

- 6.1 The Seller shall ensure that the Object of Purchase and Related Activities are in compliance with this Contract including all its annexes and applicable legal (e.g. safety), technical and quality norms.
- 6.2 During the performance of this Contract the Seller proceeds independently. If the Seller receives instructions from the Buyer, the Seller shall follow such instructions unless these are against the law or in contradiction to this Contract. If the Seller finds out or should have found out if professional care was exercised that the instructions are for any reason inappropriate or illegal or in contradiction to this Contract, then the Seller must notify the Buyer.
- 6.3 All things necessary for the performance of this Contract shall procure the Seller, unless this Contract stipulates otherwise.
- 6.4 The Seller is aware that the Buyer does not have at its disposal premises for the storage of packaging and, therefore, shall not store packaging of the Object of Purchase. The absence of original packaging cannot be an excuse for refusal of elimination of defects of the Object of

Purchase.

7. HANDOVER OF THE OBJECT OF PURCHASE

7.1 Handover and takeover of the Object of Purchase shall be realized on the basis of a handover protocol, which shall contain following information ("**Handover Protocol**"):

- a) identification of the Seller, Buyer and subcontractors, if there are any,
- b) declaration of the Seller and Buyer that all Related Activities were carried out,
- c) description of the Object of Purchase, and
- d) date of the signature.

7.2 The Handover Protocol must contain following annexes, which shall be elaborated by the Seller:

- a) the protocol on testing that was carried out at Seller's premises,
- b) a list of items of the Object of Purchase,
- c) a declaration of the Seller that the Object of Purchase is in accordance with this Contract, applicable laws and technical norms.

7.3 If the Seller does not hand over to the Buyer all above mentioned documents or if the Seller fails to duly carry out all Related Activities or if the Object of Purchase does not meet requirements of this Contract, the Buyer is entitled to refuse the takeover of the Object of Purchase. In such a case the Seller shall remedy the deficiencies within ten (10) working days, unless Parties agree otherwise. The Buyer is entitled (but not obliged) takeover the Object of Purchase despite the above mentioned deficiencies, in particular if such deficiencies do not prevent the Buyer in the proper operation of the Object of Purchase. In such a case the Seller and the Buyer shall list the deficiencies in the Handover Protocol, including the manner and the date of their removal (remedy). If the Parties do not reach agreement in the Handover Protocol regarding the date of the removal, the Seller shall remove the deficiencies within ten (10) working days.

7.4 In case that the Seller notifies the Buyer that the Object of Purchase is eligible for handover and takeover and during the course of the handover procedure it will be ascertained that the conditions under this Contract for the signature of the Handover Protocol are not fulfilled and based on this reason the Buyer will refuse to sign the Handover Protocol, then the Seller shall reimburse the Buyer for all costs that were incurred by the Buyer due to unsuccessful handover.

7.5 Parties exclude the application of the Section 2126 of the Civil Code.

8. WARRANTY

8.1 The Seller shall provide a warranty of quality of the Object of Purchase for the period of 12 months. If on the warranty list or other document is the warranty period of longer duration, then this longer warranty period shall have priority over the period stated in this Contract.

8.2 The warranty period shall begin on the day when the Object of Purchase (or its part) was used by

the Buyer for the first time (and the Object of Purchase was removed from the sealed storage location). The Buyer shall inform the Seller of the day when warranty period started. If the Buyer does not start using the Object of Purchase within two (2) years from the signature of the Handover Protocol, the warranty period shall start on the first day of the third year after the signature of the Handover Protocol.

- 8.3 The Seller shall remove defects that occur during the warranty period free of charge (i.e no charge for spare parts, workmanship, travel expenses, etc.) and in the periods of time stipulated in this Contract. Photocathodes for the XSCS are considered consumables and are not covered under warranty.
- 8.4 If the Buyer ascertains a defect of the Object of Purchase during the warranty period, the Buyer shall notify such defect without undue delay to the Seller. Defects may be notified on the last day of warranty period, at the latest.
- 8.5 The Buyer notifies defects in writing via e-mail. The Seller shall accept notifications of defects on the following e-mail address: klecka@optixs.cz. The Seller shall confirm within 96 hours from the receipt of the notification.
- 8.6 In the notification the Buyer shall describe the defect and the manner of removal of the defect. The Buyer has the right to:
- a) ask for the removal of the defect by the delivery of new Object of Purchase or its individual parts, or
 - b) ask for the removal of the defect by repair, or
 - c) ask for the reasonable reduction of the Purchase Price.

The choice among the above mentioned rights belongs to the Buyer. The Buyer is also entitled to withdraw from this Contract, if by delivering the Object of Purchase with defects this Contract is substantially breached.

- 8.7 The Seller shall remove the defect within 14 days from its notification, unless Parties agree otherwise.
- 8.8 The Seller shall remove the defect within terms stipulated in this Contract even if the notification of the defect is in his opinion unjustified. In such a case the Seller is entitled to ask for reimbursement of the costs of removal of the defect. If Parties disagree on whether the notification of the defect is justified or not, the Buyer shall ask an expert for the expert's opinion, which shall determine whether the notification of the defect was justified or not. In the case that the expert shall consider the notification as justified, then the Seller shall bear costs of the expert's opinion. If the expert considers the notification to be unjustified, then the Buyer shall reimburse the Seller for verifiably and effectively incurred costs of removal of the defect.
- 8.9 Parties shall execute a protocol on the removal of the defect, which shall contain the description of the defect and the confirmation that the defect was removed. The warranty period shall be extended by a period of time that elapses between the notification of the defect until its removal.
- 8.10 In case that the Seller does not remove the defect within stipulated time or if the Seller refuses to

remove the defect, then the Buyer is entitled to remove the defect at his own costs and the Seller shall reimburse these costs within 10 days after the Buyer's request to do so.

8.11 The warranty does not cover defects caused by unprofessional manipulation or by the failure to follow Seller's instructions for the operation and maintenance of the Object of Purchase.

8.12 Parties exclude the application of Section 1925 of the Civil Code.

9. TECHNICAL SUPPORT AND ADDITIONAL SERVICES

9.1 For the ten year period starting from the day of the signature of the Handover Protocol, the Seller has to provide the following services without any cost to the Buyer:

- a) any technical support (by email or by phone) required for troubleshooting the Object of Purchase.
- b) any software updates that might be needed to keep the Object of Purchase functioning, as well as maintaining the cyber/network security of the control computer.

9.2 For the ten year period starting from the day of signature of the Handover Protocol, the Seller has to provide the following services to the Buyer under standard business conditions:

- a) In case of any hardware failure, the Seller shall send replacement modules. If required, the Seller shall provide onsite personnel at the Buyer's facility at Dolní Břežany for troubleshooting and repairs.
- b) If the problem requires repair to be done at Seller's facility, the Buyer shall send the necessary equipment to the Seller's facility and the Seller has to return the equipment after the necessary repairs.

10. REPRESENTATIONS AND WARRANTIES OF THE SELLER

10.1 The Seller represents and warrants to the Buyer that

- a) has all the professional prerequisites necessary for the proper fulfilment of this Contract,
- b) is fully authorized to perform this Contract, and
- c) there are no obstacles on the Seller's side that would preclude him from the due performance of this Contract.

11. PENALTIES

11.1 If the Seller is in default regarding the delivery of the Object of Purchase, i.e. the Seller breaches its duty to perform this Contract in time and due manner, the Seller shall pay to the Buyer a contractual penalty in the amount of 0,1% of the Purchase Price for every (even commenced) day of default.

11.2 If the Seller is in default with the removal of the defect, the Seller shall pay to the Buyer a contractual penalty in the amount of 0,01% of the Purchase Price for every (even commenced) day

of default.

- 11.3 The Seller shall pay contractual penalties within fifteen (15) days from the day, on which the Buyer enumerated its claims. The payment of contractual penalties shall not affect the right of the Buyer to damages even to the extent to which such damages exceeds the contractual penalty.
- 11.4 Total amount of contractual penalties that the Buyer is entitled to claim shall not exceed 30 % of the Purchase Price.
- 11.5 The Buyer is entitled to unilaterally set off claims arising from the contractual penalties against the claim of the Seller for the payment of the Purchase Price.
- 11.6 Parties exclude the Section 2050 of the Civil Code.

12. RIGHT OF WITHDRAWAL

- 12.1 The Buyer is entitled to withdraw from this Contract without any penalties, if any of the following circumstances occur:
- a) the expenses or the part of the expenses that will arise on the basis of this Contract will be found by the provider of the grant or other control body as ineligible;
 - b) the Seller shall be in delay with the fulfilment of this Contract and such delay lasts more than two (2) months;
 - c) the Object of Purchase shall not fulfil the requirements stipulated in this Contract, in particular in Annex 1 (*Technical Specification*);
 - d) the Buyer shall lose a grant for the realization of the Project;
 - e) the insolvency proceeding is initiated against the Seller; or
 - f) the Buyer ascertains that the Seller provided in its bid for the Public Procurement information or documents that do not correspond to the reality and that had or could have had impact on the result of the tendering procedure, which preceded the conclusion of this Contract.

13. SPECIAL PROVISIONS

By signing this Contract, the Seller becomes a person that must cooperate during the finance control within the meaning of Section 2 letter e) of the act no. 320/2001 Coll., on finance control in the public administration, and shall provide to the Directing Body of the Operational Programme Research and Development for Innovations or other control bodies access to all parts of the bid, Contract or other documents that are related to the legal relationship formed by this Contract. This duty also covers documents that are Object to the protection in accordance with other acts (business secrets, secret information, etc.) provided that control bodies fulfil requirements stipulated by these acts (e.g. Section 11 letter c) and d), Section 12(2) letter f) of the act no. 552/1991 Coll., on state control). The Seller shall secure that all its subcontractors are also obliged to cooperate with control bodies in the above stipulated extent. The possibility of effective control

must be preserved until the year 2021.

14. CONFIDENTIALITY

Parties shall not disclose information that shall become available to them in connection with this Contract and its performance and whose disclosure could harm the other Party. Duties of the Buyer ensuing from the applicable legal regulations remain unaffected.

15. REPRESENTATIVES OF THE PARTIES

15.1 The Seller appoints following representatives for the communication with the Buyer:

In technical matters:

Name: Ing. Martin Klečka

E-mail: klecka@optixs.cz

Tel.: + 420 607 014 278

In contractual matters:

Name: Ing. Aleš Jandík

E-mail: jandik@optixs.cz

Tel.: +420 607 014 292

15.2 The Buyer appoints following representatives for the communication with the Seller:

Name: Deepak Kumar Batheja

E-mail: deepak.kumar@eli-beamlines.eu

Name: Katerina Falk

E-mail: katerina.falk@eli-beamlines.eu

Name: Petr Bruza

E-mail: petr.bruza@eli-beamlines.eu

16. FINAL PROVISIONS

16.1 This Contract is governed by the laws of the Czech Republic, especially by the Civil Code.

16.2 All disputes arising out of this Contract or out of legal relations connected with this Contract shall be preferable settled by a mutual negotiation. In case that the dispute is not settled within sixty (60) days, such dispute shall be decided by courts of the Czech Republic in the procedure initiated by one of the Parties.

16.3 The Seller bears the risk of changed circumstances within the meaning of Section 1765 of the Civil Code.

16.4 The Seller takes into account that the Buyer is not in relation to this Contract an entrepreneur, nor the subject matter of this Contract is connected with the business activities of the Buyer.


16.5 The Seller is not entitled to set off any of its claims or his debtor's claims against the Buyer's

claims. The Seller is not entitled to transfer its claims against Buyer that arose on the basis or in connection with this Contract on third parties. The Seller is not entitled to transfer rights and duties from this Contract or its part on third parties.

- 16.6 All modifications and supplements of this Contract must be in writing.
- 16.7 If any of provisions of this Contract are invalid or ineffective, the Parties are bound to change this Contract in such a way that the invalid or ineffective provision is replaced by a new provision that is valid and effective and to the maximum possible extent correspond to the original invalid or ineffective provision.
- 16.8 If any Party breaches any duty under this Contract and knows or should have known about such breach, it shall notify it to the other Party and shall warn such Party of possible consequences of the breach.
- 16.9 This Contract is executed in four (4) counterparts and every Party shall receive two (2) counterparts.
- 16.10 An integral part of this Contract is Annex I (Technical Specification). In case of any discrepancy between the provisions of this Contract and the provisions of Annex I (Technical Specification) the provisions of this Contract shall prevail.
- 16.11 This Contract shall be valid and effective on the date of the signature of both Parties.

IN WITNESS WHEREOF attach Parties their handwritten signatures:


Buyer

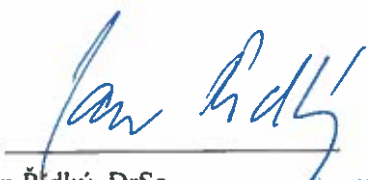Signature: 

Name: prof. Jan Řídký, DrSc.

Position: director

Date: 14.10.2015


Fyzikální ústav AV ČR
veřejná výzkumná instituce
182 21 Praha 8, Na Slovance 2
- 1 -

Seller

Signature: 

Name: Ing. Aleš Jandík

Position: CEO

Date: 10.10.2015


OptiXs s.r.o.
Křivoklátská 37, 199 00 Praha 9
IČ: 02016770 DIČ: CZ02016770
www.optixs.cz

ANNEX 1

TECHNICAL SPECIFICATION

Technical requirements

Optical and X-ray streak cameras for experimental areas

Content

1	Introduction	3
1.1	Purpose.....	3
1.2	Scope	3
1.3	Terms, Definitions and Abbreviations	3
1.4	Structure of the Document	4
2	General description	4
3	Common requirements of all streak camera systems.....	4
3.1	Scope of delivery	4
3.2	Determination of spatial resolution (and it's distortion) in static mode.....	5
3.3	Sweep range calibration	7
3.4	Measurement of time resolution and number of temporally resolved events	8
3.5	Verification methods	9
3.6	Other Instructions	9
4	Requirements for VSCS.....	9
5	Requirements for IRSCS	12
6	Requirements for XSCS.....	12

1 Introduction

1.1 Purpose

This document lists the technical requirements, calibration and testing procedures and constraints on the delivery of visible, infra-red and X-ray streak camera systems for ELI-Beamlines.

1.2 Scope

This document contains the functional, performance, safety, operational, design, testing and calibration requirements for the streak camera systems in ELI.

1.3 Terms, Definitions and Abbreviations

For the purpose of this document, the following abbreviated terms apply:

Abbreviation	Meaning
ADU	Analog-Digital Unit
ELI	Extreme Light Infrastructure
EUV	Extreme ultraviolet
QA	Quality Assurance
RA	Research Activity
SCS	Streak camera system
XSCS	X-ray streak camera system
VSCS	Visible streak camera system
IRSCS	Infra-red streak camera system
lp	Line pairs
lp/mm	Line pairs per millimeter
MTF	Modular transfer function
FWHM	Full width at half maximum
EMP	Electro-Magnetic Pulse

The following table defines the variables used in this document:

Variable	Meaning
l	Effective length of photocathode in millimetres. Note that the l may be less than the length of the photocathode, as it is the length over which the spatial resolution of the SCS is within the limits defined in section 3.2
h	Height of the input slit in micrometers
x	Spatial resolution in lp/mm of the SCS
$V_{\max}$	The minimum of (a) maximum voltage that can be applied to the streak tube while the image of the photocathode/slit still lies completely within the field

	of view of the digital detection device of the SCS, or (b) the maximum voltage applied by the sweep unit of the SCS. Note that the image of the photocathode is at the center of the output screen when 0 Volts is applied to the streak tube.
Sweep range	The duration in time over which the sweep unit applies a voltage ranging from $-V_{\max}$ to $V_{\max}$.
Spatial resolution unit	$=1/x$ in millimeters or $1000/x$ in micrometers
Δt	Time resolution of the SCS in picoseconds. The procedure for calculation is described in section 3.4

1.4 Structure of the Document

Section 3 describes the general requirements and procedures that are applicable to all the the streak camera systems planned to be procured in this tender. Individual requirements for the separate streak camera systems are described in sections 4, 5 and 6.

2 General description

Streak cameras are high speed imaging diagnostics used for measuring fast phenomenon. Three streak camera systems are planned to be acquired by ELI Beamlines. Each of the three streak cameras are optimized to be sensitive to various wavelengths

1. Visible streak camera system (VSCS) is sensitive to visible wavelengths
2. Infra-red streak camera system (IRSCS) is sensitive to infra-red.
3. X-ray streak camera system (XSCS) is sensitive to EUV and X-ray wavelengths

The exact technical requirements of the individual camera systems are provided in the sections 4, 5 and 6.

3 Common requirements of all streak camera systems

Each streak camera system will include input optics (if specified in the sections below), choice of photocathodes, streak tubes, sweep units, digital readout systems, power supplies, control software and computer (if specified below). The seller must provide the complete system including all the components required for the system to operate independently (unless some specific component is specifically listed not to be included).

3.1 Scope of delivery

Each SCS must be delivered along with the following items

- The streak cameras system with streak tube, sweep unit(s), hardware for detection and recording, and hardware to control the sub-components of SCS.
- Any high voltage supplies that might be required for the operation of the SCS.

- The seller shall specify the trigger and delay requirements for the sweep unit, camera, etc. The buyer shall provide the necessary triggers during the operation of the SCS at the buyers facility in Dolní Brežany. The seller does not need to include and delay trigger generators as part of SCS shipment. Any delay generators required for the calibration tests before shipping the product shall be arranged for by the seller.
- Power, control, trigger and communication cables required for the operation of the SCS.
- Calibration data for the SCS as per the requirements described in this sections 3.2, 3.3 and 3.4.
- Operation manual in English for the SCS.

In addition, the XSCS shall be delivered with the following extra items:

- Installed in an air tight box with the necessary connectors and cooling.
- The seller shall also provide the design for an adaptor flange to mount the XSCS on a DN400 ISO F port.

3.2 Determination of spatial resolution (and it's distortion) in static mode

This sub section describes the setup for determining the spatial resolution of the SCS in static mode. The seller must provide the experimental results of this procedure (including raw data and final results). These results will be used for the verification of the SCS and also as the deciding criterion for its acceptance. All expenses including material and facility usage/rental for this test has to be covered by the seller, and must be performed before shipping the product.

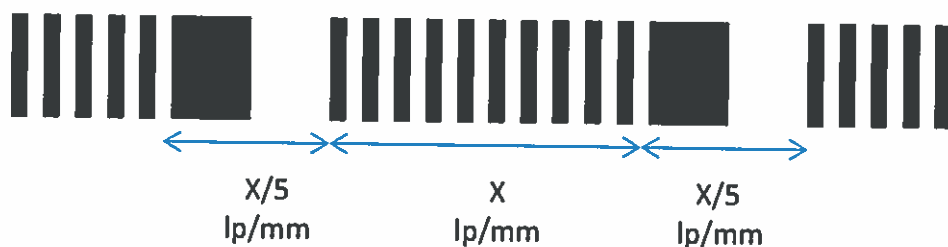


Figure 1: Example of a resolution grid

This test has to be performed using a resolution grid. An example of a resolution grid is shown in Figure 1. The length of the resolution grid must be such that it covers the entire length of the photocathode. The resolution grid shall have a repeated pattern of “10 pairs of x lp/mm grid and 1 pair of $x/5$ lp/mm”. Where “ x lp/mm” is the spatial resolution that the seller has to demonstrate, and it must be equal to or better than the specification in the requirement of the SCS.

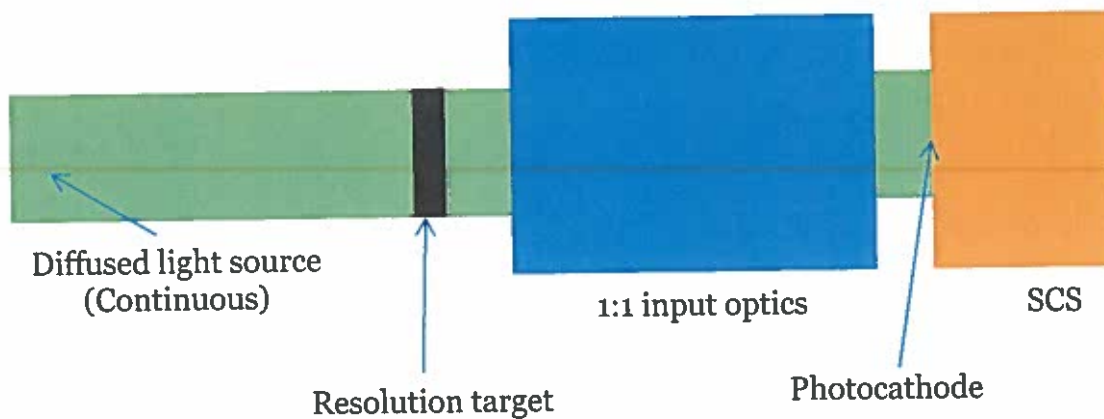


Figure 2: Schematic (block diagram) of the setup for static calibration of spatial resolution of the SCS

A schematic of the setup for static calibration is shown in Figure 2. The seller has to provide data sets and calibration results for three different static bias voltages on the streak tube:

- No bias,
- Bias of $+0.66 \times V_{\max}$ volts,
- Bias of $-0.66 \times V_{\max}$ volts.

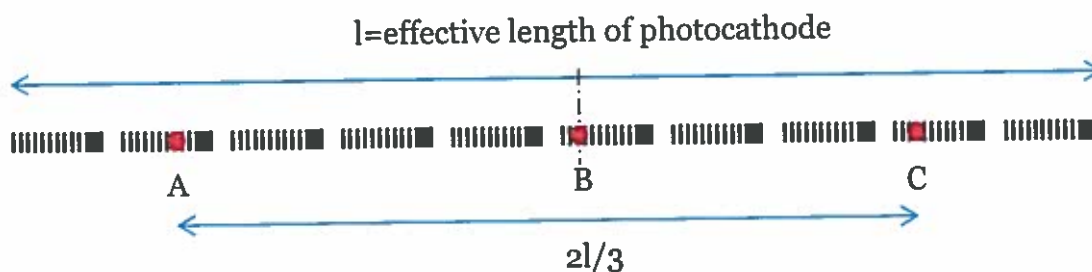


Figure 3: Example of a typical image of the resolution grid collected by the streak camera at static bias. The number of line pairs of the resolution grid shown here is only symbolic.

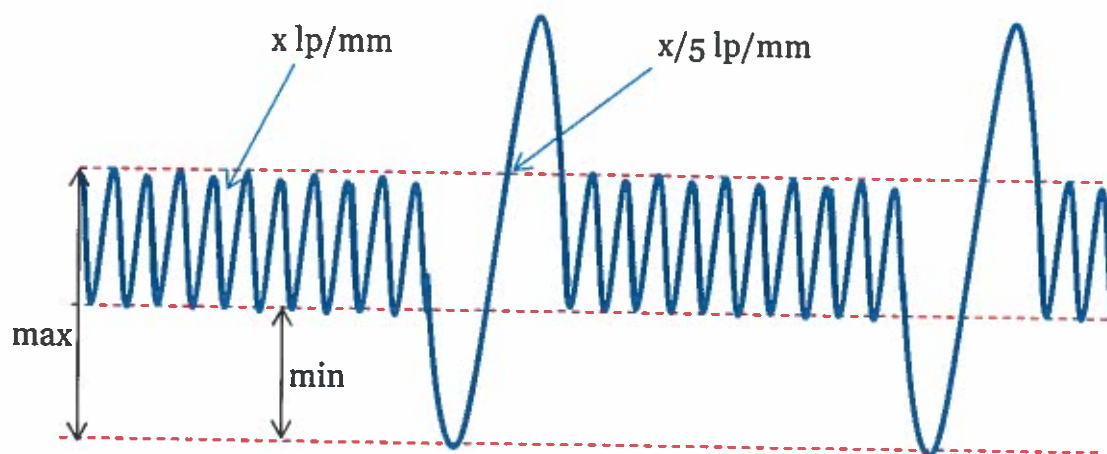


Figure 4: Section of the typical lineout measured by the SCS.

From the measured data, the seller shall calculate and document the modular transfer function at various locations on the digital output using the procedure described below:

1. The following steps shall be repeated for the three different bias voltages described above.
2. The typical image of the resolution grid for each bias voltage is shown in Figure 3. The seller has to measure and tabulate the MTF at locations A, B and C, as defined in the figure.
3. Typically expected line out of the average intensity in the vicinity of these points is shown in Figure 4. From this lineout, MTF shall be calculated as $MTF = (max - min) / (max + min)$, where max and min are the average ADUs of the lineout of the resolution grid as shown in the Figure 4.
4. The seller shall thus calculate the MTF at the nine instances by this procedure (three biases x three spatial locations).

The MTF at the point B at no bias should be greater than 50% and for the remaining eight instances has to be greater than 45%.

3.3 Sweep range calibration

This sub section describes the procedure for determining the sweep range calibration of the SCS. The seller must provide the experimental results of this procedure (including raw data and final results). These results will be used for the verification of the SCS. All expenses including material and facility usage/rental for this procedure has to be covered by the seller, and must be performed before shipping the product.

The seller shall provide the calibration of time vs pixel number for each sweep range of the SCS. The method to generate the sweep range calibration is described below. The seller shall follow this calibration procedure unless agreed otherwise by both the parties.

The seller shall generate a train of equally spaced optical pulses by any of the following methods:

1. by coupling a Ti:Sa laser to a precisely calibrated etalon.
2. by using a comb generator

The FWHM duration of each pulse in the train has to be less than the time resolution for the particular sweep range being calibrated. The pulse train must be focussed on the photocathode and the seller shall measure the streaked image of the pulses at the centre of the photocathode. The source of the pulse train shall be adjusted to have greater than 10 pulses measured in the streaked image for every sweep range. The seller shall use a centroid finding algorithm to estimate the location of the peaks. The seller shall provide the pixel location vs relative time calibration from the location of the centroids. These calibration results shall be provided to the buyer in an ASCII table.

The seller shall also calculate the linearity slope and the percentage error in the linearity of the SCS using the following formulas:

$$\text{Linearity slope} = m = \frac{(n \sum_{i=1}^n x_i y_i) - (\sum_{i=1}^n x_i)(\sum_{i=1}^n y_i)}{(n \sum_{i=1}^n x_i^2) - (\sum_{i=1}^n x_i)^2}, \text{ in px/ps}$$

Equation 1

$$\text{Intercept} = c = \frac{(\sum_{i=1}^n x_i^2)(\sum_{i=1}^n y_i) - (\sum_{i=1}^n x_i)(\sum_{i=1}^n x_i y_i)}{(n \sum_{i=1}^n x_i^2) - (\sum_{i=1}^n x_i)^2}$$

$$\text{slope error} = \sqrt{\frac{\sum_{i=1}^n (y_i - mx_i - c)^2}{n - 2}} \sqrt{\frac{n}{(n \sum_{i=1}^n x_i^2) - (\sum_{i=1}^n x_i)^2}}$$

$$\text{percentage slope error} = \frac{\text{slope error}}{\text{abs}(m)} 100$$

Where, n is the number of pulsed profiles measured in the streaked image, x_i are the relative time in ps of the pulses and y_i are the corresponding location of centroid expressed in pixels.

The SCS must have a percentage slope error of less than 10% for all sweep ranges, and a percentage slope error of less than 2% for sweep range of 10 ns and 20 ns.

3.4 Measurement of time resolution and number of temporally resolved events

This sub section describes the procedure for determining the time resolution of the SCS. The seller must provide the experimental results of this procedure (including raw data and final results). These results will be used for the verification of the SCS. All expenses

including material and facility usage/rental for this procedure has to be covered by the seller, and must be performed before shipping the product.

The seller shall calculate the time resolution for each sweep range of the SCS. The seller shall follow the following calibration procedure unless agreed otherwise by both the parties. No additional experiments are required for this measurement. The seller shall calculate the time resolution using the data collected for sweep range calibration described in section 3.3. For each pulse in the streaked image measured by the SCS, the seller shall calculate the FWHM in number of pixels. The seller shall then calculate the time resolution of the SCS in ps for each sweep range using the following formula:

$$\text{time resolution in ps} = \Delta t = \frac{1}{mn} \sum_{i=1}^n (\text{FWHM of pulse } i)$$

Equation 2

, where m is defined in Equation 1.

The seller shall also calculate the number of temporally resolved events measurable by the SCS for each sweep range using the following formula:

$$\text{number of temporally resolved events} = \frac{\text{sweep range in ps}}{\Delta t}$$

3.5 Verification methods

The seller shall allow for a representative from the buyer to participate in the experiments to calibrate the SCS as per the methods described above. If the representative from the buyer participates in the calibration tests, then all the expenses for his/her travel and lodging will be covered by the buyer.

- The seller has to provide the description (part number, etc.), datasheet and results of any calibration performed by the original manufacturer of each individual component of the SCS. This information will be used by the buyer to verify the performance required of the SCS.
- The results from the calibration processes described in sections 3.2, 3.3 and 3.4 will also be used to verify that the performance of SCS meets the required conditions and hence to decide on the criterion of its acceptance.

3.6 Other Instructions

Bidders have to describe the complete SCS system (including specific part numbers of individual components) and parameters achieved for each requirement described in the following sections.

4 Requirements for VSCS

Table 1: Technical specifications and requirements for the VSCS

Parameter	Requirement
Energy range of operation	The VSCS has to be optimized for detecting input photons in the range of 200-850 nm.
Photocathode	VSCS shall use the S-20 photocathode. The window material has to be chosen so that the transmission through the window in the wavelength range of 200-850 nm is greater than 80% The effective length of the photocathode (l) has to be greater than 4 mm. The final digital imaging system (CCD) of the VSCS has to be capable of measuring this entire effective length.
Spatial resolution in static mode	The spatial resolution (x), has to be greater than 10 lp/mm. The spatial resolution (x) and the effective length of the photocathode (l) shall be such that the number of spatial resolution units ($l \cdot x$) is greater than 65. The seller has to demonstrate the MTF and the distortion in spatial resolution is within acceptable limits at static bias applied to the streak tube. The limits and the detailed procedure for determining the distortion in spatial resolution is described in Section 3.2.
Sweep ranges	The system has to offer a choice of sweep range(s) which allows it to be operated at the best time resolution. In addition the system shall offer at least the following sweep ranges: 5 ns, 10 ns, 20 ns, 50 ns (within limit of $\pm 10\%$). These can be provided by a single sweep unit or by interchangeable sweep units. The supplier has to provide the time vs pixel calibration curves for the sweep ranges as described in section 3.3
Time resolution	For the fastest sweep range, the temporal resolution has to be less than 2 ps. For all sweep range settings, the SCS has to be able to record greater than 90 temporally resolved events for each sweep range (see section 3.4 for definition).
Trigger parameters	The SCS is planned to operate with a single trigger and not be synchronized to an external oscillator for integrated measurements. The triggering jitter for the SCS has to be less than 10 ps rms for single shot measurements.
Repetition rate	The entire system (including triggering, hold off and camera readout) has to operate at a repetition rate ≥ 100 Hz. Note, that if the digital camera has to be binned to achieve this repetition rate, the SCS has to still satisfy all the constraints mentioned in this table.
Detection technology	The seller has to provide the detection technology, i.e., a scientific grade camera and coupling optics to the streak tube and phosphor. The seller can use either of the two technologies to achieve this: • Tapered (or 1:1) fiber optic bundle from the phosphor at the end of the streak tube directly bonded to a cooled scientific grade camera. Such a camera shall have 16 bit measurement capability per pixel, have a quantum efficiency $> 90\%$ at the emission wavelength of the phosphor, have a readout noise level of less than 4 e^- per pixel and have a full well capacity of greater than 80000 electrons (non-binned) or • Have an intensifier to amplify the output of the streak tube which is lens or fiber coupled to a scientific grade digital camera. Such a camera has to be 16 bit, have a readout noise level of less than 3 e^- per pixel, have a dynamic range of better than 30000 (non-

	binned). Note that the intensifier can either be external to the streak tube i.e., amplifies the visible image on the phosphor at the end of the streak or be internal to the streak tube i.e., amplifies the electrons created and accelerated by the streak tube. The magnification of the SCS and the detection technology must be so designed that a spatial resolution unit at the center of the photocathode is covered by at least 4 pixels by the digital camera. The magnification of the SCS and the detection technology must be so designed that the time resolution for each sweep range shall be covered by at least 4 pixels by the digital camera, i.e., $m\Delta t \geq 4$ (see Equation 1 and Equation 2). The seller has to use standard connectors for cooling water, if required for the detection technology. The buyer shall provide the cooling water connection if required.
Input optics and slits	The seller shall provide input optics for the SCS if the input optics is required for enabling the operation of SCS at the best time resolution. The input optics is not required for those SCS models where the photons can be directly focused on the photocathode and no external slit is required to achieve the best time resolution. If input optics is provided, it shall consist of an adjustable slit (with micrometer) and lens optics of f number between 4.0 and 6.0, with a magnification of 1.
Size and vacuum requirements	No specific requirements.
Mounting holes	The front face of the streak camera (close to the input slit) shall have tapped holes for connecting an external spectrometer if needed. The seller has to consult with the buyer to finalize the location of these tapped holes for certain spectrometer models.
Software, data interface and control	The seller must provide the control software pre-installed on a computer. It is not necessary to provide the computer peripherals like monitor and keyboard. The seller must also provide the buyer with the access and rights to install the analysis and control software on multiple computers for the purpose of research. Buyer will not distribute or install the software to third parties. The control software must also give user the access to raw data (i.e., without any software based correction for jitter and calibrations). It is highly desirable that the control computer use a Linux® based operating system and the control software be interfaced to the tango control infrastructure (http://www.tango-controls.org/). The control software should be able to accept remote scripts (in ASCII, etc.) to configure/control the VSCS and store its data.

5 Requirements for IRSCS

The requirements for the IRSCS are same as the requirements of the VSCS described in section 4. Only the differences are described in the table below:

Table 2: Technical specifications and requirements for the IRSCS

Parameter	Requirement
Energy range of operation	The IRSCS has to be optimized for detecting input photons in the range of 400-1400 nm.
Photocathode	IRSCS shall use the S-1 photocathode. The window material has to be chosen so that the transmission through the window in the wavelength range of 400-1400 nm is greater than 80%. The effective length of the photocathode (l) has to be greater than 4 mm. The final digital imaging system (CCD) of the IRSCS has to be capable of measuring this entire effective length.
Repetition rate	The entire system (including triggering, hold off and camera readout) has to operate at a repetition rate ≥ 0.1 Hz.

6 Requirements for XSCS

Table 3: Technical specifications and requirements for the XSCS

Parameter	Requirement
Energy range of operation	The XSCS has to be optimized for detecting input photons in the energy range of 100-10000 eV. X-ray and EUV photons have to be detected on the photocathode by transmission and not by reflection at grazing incidence.
Photocathode	The design of the XSCS shall be such that the photocathode is exposed directly to the vacuum of a large experimental chamber for laser plasma research. Designs where the photocathode is in a different vacuum, separated by windows like Beryllium is not acceptable. The seller has to provide one new KI photodiode with the XSCS. The XSCS has to be designed so that the photocathodes are interchangeable. The seller shall provide the mechanical designs for the support of the photocathode, so that the buyer can procure additional photocathodes later. The calibration tests described in sections 3.2, 3.3 and 3.4 shall be performed using a UV photocathode and an UV source. The effective length of the photocathode (l) has to be greater than 12 mm. The final digital imaging system (CCD) of the XSCS has to be capable of measuring this entire effective length.
Spatial resolution in	The spatial resolution (x), has to be greater than 16 lp/mm. The spatial resolution (x) and the effective length of the photocathode (l) shall be

static mode	such that the number of spatial resolution units ($l \cdot x$) is greater than 200. The seller has to demonstrate the MTF and the distortion in spatial resolution is within acceptable limits at static bias applied to the streak tube. The limits and the detailed procedure for determining the distortion in spatial resolution is described in Section 3.2.
Sweep ranges	The system has to offer a choice of sweep range(s) which allows it to be operated at the best time resolution. In addition the system shall offer at least the following sweep ranges 5 ns, 10 ns, 20 ns, 50 ns (within limit of $\pm 10\%$). These can be provided by a single sweep unit or by interchangeable sweep units. The supplier has to provide the time vs pixel calibration curves for the sweep ranges as described in section 3.3
Time resolution	For the fastest sweep range, the temporal resolution has to be less than 1 ps. For all sweep range settings, the XSCS has to be able to record greater than 300 temporally resolved events for each sweep range (see section 3.4 for definition).
Trigger parameters	The XSCS is planned to operate with a single trigger and not be synchronized to an external oscillator for integrated measurements. The triggering jitter for the XSCS has to be less than 20 ps rms for single shot measurements.
Repetition rate	The entire system (including triggering, hold off and camera readout) has to operate at a repetition rate ≥ 0.1 Hz. Note, that if the digital camera has to be binned to achieve this repetition rate, the XSCS has to still satisfy all the constraints mentioned in this table.
Detection technology	The seller has to provide the detection technology, i.e., a scientific grade camera and coupling optics to the streak tube and phosphor. This has to be done using a tapered (or 1:1) fiber optic bundle from the phosphor at the end of the streak tube directly bonded to a cooled scientific grade camera. Such a camera shall have 16 bit measurement capability per pixel, have a quantum efficiency $> 90\%$ at the emission wavelength of the phosphor, have a readout noise level of less than $4 e^-$ per pixel and have a full well capacity of greater than 80000 electrons (non-binned). The magnification of the XSCS and the detection technology must be so designed that a spatial resolution unit at the center of the photocathode is covered by at least 4 pixels by the digital camera. The magnification of the XSCS and the detection technology must be so designed that the time resolution for each sweep range shall be covered by at least 4 pixels by the digital camera, i.e., $m\Delta t \geq 4$ (see Equation 1 and Equation 2). The seller has to use standard connectors for cooling water for the detection technology. The buyer shall provide the cooling water connection.
Slit	The seller shall provide a fixed slit mounted on the XSCS. The seller has to choose the height of the slit to be the maximum possible so that the XSCS meets the requirement on time resolution. The seller shall also provide the engineering drawings of the slit and its mount, so that the buyer can mount a different slit later if needed.
Size and	The XSCS is planned to operate in an air tight box inside a large vacuum

vacuum requirements	chamber. The seller shall provide such a box made of Aluminum, with the XSCS installed in it. The box (excluding the connectors) has to be smaller in size than 20 cm x 20 cm x 80 cm, unless agreed otherwise by both the parties. The front face of the box, close to the photocathode shall have four guide pins for positioning. The box shall be so designed that the top lid of the box can be opened easily for accessing and diagnosing the various sub components of the XSCS. The box shall be able to mount to standard optical breadboards at any orientation, with the breadboard being either below or above the box. The front panel of the box shall provide easy access for replacing the photocathode and have tapped holes for mounting an external X-ray spectrometer. The back panel of the box shall have the necessary electronic, optic, power and cooling connectors and feedthrough. The seller shall include the necessary cooling system within the box for reliable operation of the XSCS. The seller shall provide the design of such a box to the buyer for approval before the manufacture of the box. Prior to shipping the XSCS, the seller shall demonstrate that the system is airtight and operational within a sufficiently large vacuum chamber. The seller shall also provide the design for adaptor flange(s) to mount the XSCS (including the box) shall on a DN400 ISO F flange. The XSCS shall be shipped to the buyer in a vacuum tight enclosure covering at least the photocathode. Such an enclosure shall have a pump down port which can be used for long term storage of the XSCS.
EMP shielding	The seller shall enclose the necessary electronics (streak tube, sweep unit, etc) inside an EMP shielded enclosure. The design of such an enclosure has to be demonstrated to have worked for shielding an X-ray streak camera system from EMP generated during laser plasma experiments where an energy greater than 1 kJ is incident on target.
Mounting holes	The vacuum interface flange shall have tapped holes for connecting an external spectrometer and/or X-ray foil filters if needed. The seller has to consult with the buyer to finalize the location of these tapped holes.
Software, data interface and control	The seller must provide the control software pre-installed on a computer. It is not necessary to provide the computer peripherals like monitor and keyboard. The seller must also provide the buyer with the access and rights to install the analysis and control software on multiple computers for the purpose of research. The buyer will not distribute or install the software to third parties. The control software must also give user the access to raw data (i.e., without any software based correction for jitter and calibrations). It is highly desirable that the control computer use a Linux® based operating system and the control software be interfaced to the tango control infrastructure (http://www.tango-controls.org/). The control software should be able to accept remote scripts (in ASCII, etc.) to configure/control the VSCS and store its data.

Optical and X-ray streak cameras for experimental areas

Technical description:

The subject of delivery would be Infra-red streak camera system (IRSCS), model C10910-02 from Hamamatsu, which will include input optics, S1 version of photocathode, streak tube, sweep unit, digital readout system, power supply, control software and computer, all necessary hardware for detection and recording, and hardware to control the sub-components.

The list of delivered parts would be :

- Main unit including streak tube, S1 photocathode, integrated MCP
- Fast single-sweep unit, rep. rate up to 10 kHz
- Streak input optics UV-IR broadband
- Output optics for readout camera
- Temporal analyzer including computer and streak software
- Orca-Flash 4.0 readout camera, TE cooled
- Camera mount for streak unit and readout camera
- All necessary hardware like as cables, power supplies
- Calibration data
- Operation manual in English
- Shipment and insurance

We will provide the complete system including all the components required for the system to operate independently.

Technical parameters:

Parameter	Requirement	Offered value
Energy range of operation	The IRSCS has to be optimized for detecting input photons in the range of 400-1400 nm.	Yes, range would be optimized for 400-1400 nm
Photocathode	IRSCS shall use the S-1 photocathode. The window material has to be chosen so that the transmission through the window in the wavelength range of 400-1400 nm is greater than 80%. The effective length of the photocathode	Yes, IRSCS will use S-1 photocathode with borosilicate window to reach required transmission in the range 400-1400 nm. The effective length of the photocathode will be 5 mm and digital imaging system of the IRSCS will be capable of measuring this entire effective length.

	(l) has to be greater than 4 mm. The final digital imaging system (CCD) of the IRSCS has to be capable of measuring this entire effective length.	
Spatial resolution in static mode	The spatial resolution (x), has to be greater than 10 lp/mm. The spatial resolution (x) and the effective length of the photocathode (l) shall be such that the number of spatial resolution units ($l \cdot x$) is greater than 65. The seller has to demonstrate the MTF and the distortion in spatial resolution is within acceptable limits at static bias applied to the streak tube. The limits and the detailed procedure for determining the distortion in spatial resolution is described in Section 3.2.	Yes, spatial resolution will be 15 lp/mm with MTF of 50%, 17 lp/mm with MTF of 45%. Spatial resolution units will be $l \cdot x = 75$ (with MTF of 50%), $l \cdot x = 85$ (with MTF of 45%). We will demonstrate that the MTF and the distortion in spatial resolution is within acceptable limits at static bias applied to the streak tube as is described in section 3.2.
Sweep ranges	The system has to offer a choice of sweep range(s) which allows it to be operated at the best time resolution. In addition the system shall offer at least the following sweep ranges: 5 ns, 10 ns, 20 ns, 50 ns (within limit of $\pm 10\%$). These can be provided by a single sweep unit or by interchangeable sweep units. The supplier has to provide the time vs pixel calibration curves for the sweep ranges as described in section 3.3.	Yes, the system will offer a choice of several sweep ranges – 200 ps, 500 ps, 1 ns, 2 ns, 5 ns, 10 ns, 20 ns, 50 ns. Note : If it would be required, we can adapt sweep unit for additional sweep range – 70 ps. The time vs pixel calibration curves for the sweep ranges as described in section 3.3 will be provided before shipping. We can guarantee that we can reach a percentage slope error of less than 10% for all sweep ranges, and a percentage slope error of less than 2% for sweep range of 10 ns and 20 ns. The preliminary measured values at demo unit were much better.
Time resolution	For the fastest sweep range, the temporal resolution has to be less than 2 ps. For all sweep range settings, the SCS has to be able to record greater than 90 temporally resolved events for each sweep range (see section 3.4 for definition).	Temporal resolution will be < 2 ps (FWHM). Sweep range 200 ps: number of temporally resolved events: ≥ 120 All other seven sweep ranges: number of temporally resolved events: ≥ 145
Trigger parameters	The SCS is planned to operate with a single trigger and not be synchronized to an external oscillator for integrated measurements. The triggering jitter for the SCS has to be less than 10 ps rms for single shot measurements.	Yes, operation with a single trigger. The triggering jitter will be < 10 ps rms for single shot measurements.

Repetition rate	The entire system (including triggering, hold off and camera readout) has to operate at a repetition rate ≥ 0.1 Hz.	The entire system (including triggering, hold off and camera readout) will be operated at a repetition rate ≥ 0.1 Hz, up to approx. 200 Hz without binning. Readout camera will have 2048x2048 pixels in total, 1508 (H) x1016 (V) pixels are used in calibrated streak mode, max. frame rate approx 200 fps in that mode is without binning
Detection technology	The seller has to provide the detection technology, i.e., a scientific grade camera and coupling optics to the streak tube and phosphor. The seller can use either of the two technologies to achieve this: • Tapered (or 1:1) fiber optic bundle from the phosphor at the end of the streak tube directly bonded to a cooled scientific grade camera. Such a camera shall have 16 bit measurement capability per pixel, have a quantum efficiency $> 90\%$ at the emission wavelength of the phosphor, have a readout noise level of less than 4 e⁻ per pixel and have a full well capacity of greater than 80000 electrons (non-binned) or • Have an intensifier to amplify the output of the streak tube which is lens or fiber coupled to a scientific grade digital camera. Such a camera has to be 16 bit, have a readout noise level of less than 3 e⁻ per pixel, have a dynamic range of better than 30000 (non-binned). Note that the intensifier can either be external to the streak tube i.e., amplifies the visible image on the phosphor at the end of the streak or be internal to the streak tube i.e., amplifies the electrons created and accelerated by the streak tube.	Yes, scientific grade camera and coupling optics to the streak tube and phosphor will be supplied. System will use technology with internal MCP intensifier to amplify the output of the streak tube which is lens coupled to a scientific grade digital camera. Readout camera will be scientific grade camera ORCA Flash 4.2 v2, TE-cooled, 16 bit, have a readout noise level of < 1.6 e⁻ per pixel rms, have a dynamic range of better than 30000 (non-binned). The intensifier will be internal to the streak tube i.e., amplifies the electrons created and accelerated by the streak tube.

	The magnification of the SCS and the detection technology must be so designed that a spatial resolution unit at the center of the photocathode is covered by at least 4 pixels by the digital camera. The magnification of the SCS and the detection technology must be so designed that the time resolution for each sweep range shall be covered by at least 4 pixels by the digital camera, i.e., $m\Delta t \geq 4$ (see Equation 1 and Equation 2). The seller has to use standard connectors for cooling water, if required for the detection technology. The buyer shall provide the cooling water connection if required.	Yes, the magnification will be so designed that a spatial resolution unit at the center of the photocathode is covered by at least 4 pixels by the digital camera. Yes, the magnification will be so designed that the time resolution for each sweep range shall be covered by at least 4 pixels by the digital camera, i.e., $m\Delta t \geq 4$ There are standard connectors on readout camera for water cooling water.
Input optics and slits	The seller shall provide input optics for the SCS if the input optics is required for enabling the operation of SCS at the best time resolution. The input optics is not required for those SCS models where the photons can be directly focused on the photocathode and no external slit is required to achieve the best time resolution. If input optics is provided, it shall consist of an adjustable slit (with micrometer) and lens optics of f number between 4.0 and 6.0, with a magnification of 1.	We will provide streak input optics, UV-IR broadband, dispersion optimized, magnification 1:1, F/number 5.0, including variable adjustable slit by micrometer drive.
Size and vacuum requirements	No specific requirements.	Size of system is specified in attached data sheets
Mounting holes	The front face of the streak camera (close to the input slit) shall have tapped holes for connecting an external spectrometer if needed. The seller has to consult with the buyer to finalize the location of these tapped holes for certain spectrometer models.	The front face of the streak camera will be equipped with tapped holes for connecting an external spectrometer.
Software, data interface	The seller must provide the control software pre-installed on a computer.	We will provide HPD-TA temporal analyzer control system including computer, digital

and control	It is not necessary to provide the computer peripherals like monitor and keyboard. The seller must also provide the buyer with the access and rights to install the analysis and control software on multiple computers for the purpose of research. Buyer will not distribute or install the software to third parties. The control software must give user the access to raw data (i.e., without any software based correction for jitter and calibrations). It is highly desirable that the control computer use a Linux® based operating system and the control software be interfaced to the tango control infrastructure (http://www.tango-controls.org/). The control software should be able to accept remote scripts (in ASCII, etc.) to configure/control the VSCS and store its data.	camera interface, HPD-TA streak software with life long update license. Software will be pre-installed on a computer and would be possible to install it on multiple computers for the purpose of research. The control software will give user the access to raw data (i.e., without any software based correction for jitter and calibrations). Control computer runs with Windows, but the user can easily send remote commands (in ASCII) from any other computer (incl. Linux etc.) via Ethernet and TCP/IP. Everything is described in attachment "RemoteEx" feature. So, control software will be able to accept remote scripts (in ASCII, etc.) to configure/control the VSCS and store its data.
-------------	--	--

Annex No. 7 List of Questions :

List of Questions from Annex No. 7

Answers

- | | |
|---|---|
| 1. List the model and make of the streak tube to be used. | S-1 tube (in C10910-02): Hamamatsu streak tube N12142-02, modified for larger cathode size (5.0 mm) |
| 2. List the effective length of the photocathode which satisfies the definitions given in the Annex 5 | Effective length is 5.0 mm. |
| 3. List the spatial resolution in lp/mm of the SCS, as per the definition given in Annex 5 | C10910-02: 15 lp/mm with MTF of 50%, 17 lp/mm with MTF of 45% |
| 4. List the number of spatial resolution units for the SCS | C10910-02: $l^*x = 75$ (with MTF of 50%), $l^*x = 85$ (with MTF of 45%) |
| 5. List the best temporal resolution of the system. | Temporal resolution < 2.0 ps FWHM (in shortest time range).
Note : If it would be required, we can adapt camera for < 1.0 ps FWHM for free of charge. |
| 6. Describe the sweep unit(s): mention sweep range and number of temporal resolved events detectable. | 8 sweep ranges – 200 ps, 500 ps, 1 ns, 2 ns, 5 ns, 10 ns, 20 ns, 50 ns
Number of temporal resolved events detectable :
Sweep range 200 ps: number of temporally |

resolved events: ≥ 120

All other seven sweep ranges: number of temporally resolved events: ≥ 145

Note : If it would be required, we can adapt camera for additional sweep range – 70 ps

7. Describe the readout system: Kind of camera used, intensifier if any, method of coupling to the streak tube, etc.

Kind of camera : ORCA Flash 4.0 v2 scientific-CMOS camera, see separate datasheet
Intensifier : MCP integrated inside streak tube (gain controllable through software)
Method of coupling to the streak tube :
Lens coupling

8. Describe the magnification of the streak tube and of the readout system at the end of the streak tube.

It is 1:2.8 magnification (electron optics inside streak tube).
It is 50:35 de-magnification (optical lens system between streak tube and sCMOS camera).

9. Describe the data and communication link to the SCS (optical or serial or Ethernet, etc.)

The streak PC (on which the HPD-TA software is running) must stand locally near the streak camera.
This complete system can be remote-controlled by sending high-level ASCII commands via TCP/IP. (See "RemoteEx" feature.)
All system functions without exceptions are supported by that.
There are no restrictions regarding the OS of the the controlling computer (can be Linux etc.).
Recorded data (images or profiles) can be saved (a) on the local disk of the streak PC, or (b) on any shared network drive reachable by the streak PC, or (c) sent as a data stream directly via TCP/IP to the controlling computer.
All file formats are completely documented in the manual, without any omissions.
By default, the system can apply some automatic data corrections (such as background subtraction, time axis linearization, etc.), but all of them can be disabled by the user, so that the user will obtain raw data, if desired.

Values for technical evaluation criterions :

Number of spatial resolution units : $l^*x = 75$ (with MTF of 50%)
 $l^*x = 85$ (with MTF of 45%)

Number of temporally resolved events : Sweep range 200 ps: ≥ 120
All other seven sweep ranges: ≥ 145

Details and parameters are also mentioned in attached specs sheet also. These are indicative, guaranteed parameters are in table above.

Prague, 29.7.2015



Ing. Aleš Jandík, CEO
OptiXs, s.r.o.

List of attachment :

Price quote
Universal streak camera datasheet
HPD-TA data sheet
Orca Flash readout camera data sheet

OptiXs s.r.o.

Křivoklátská 37, 199 00 Praha 9
IČ: 02016770 DIČ: CZ02016770
www.optixs.cz

