



Projektová kancelář dr. Pavel Jílek



Žalhostice 120, 41101 Žalhostice

<http://www.jilek.cz>

Datová schránka: kdmwp6y

e-mail: info@jilek.cz

278/21/2024

PROJEKTOVÁ DOKUMENTACE

Technika prostředí staveb,
ochrana před atmosférickým přepětím.

Dokumentace pro provádění stavby (DPS)

ve smyslu ustanovení § 157, odst. 1., písm. d) zákona
č. 283/2021 Sb. v platném znění

05 - Návrh střídače

**Stavba: Instalace fotovoltaického systém, (FVE),
na budově Základní školy Bohušovice čp.112**

user.corpInfo


user.contactInfo

Project information

Project Name:	ZS Bohusovice	Project number:	037/2024
Location:	Czech Republic/Prague	Grid AC voltage:	Single phase~230 V
Ambient temperature:	Record Low Temperature: -10 °C Average High Temperature: 25 °C Record High Temperature: 40 °C		
Application:	Other loads consumption: 16260.0kWh/year		

NOTICE! Observe information on the "Design" page!

Total number of PV modules:	26	PV peak power:	14.3 kWp
Number of inverters:	1	Nominal AC power:	10 kW
Annual energy yield (approx.)*:	13,522.32 kWh	Line losses:	0 %

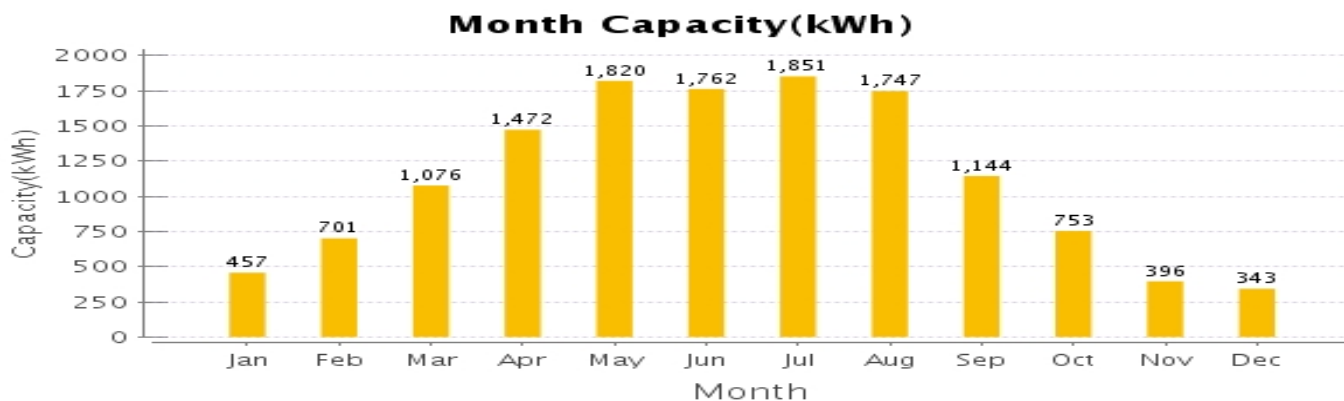

*Important: The yield values displayed are estimates. They are determined mathematically. Suntellite accepts no responsibility for the real yield value which can deviate from the yield values displayed here. Reasons for deviations are various outside conditions, such as soiling of the PV Modules or fluctuations in the efficiency of the PV modules.

Technical data

Inverter

Part number:	X3-MIC-10K-G2
PV peak power:	14.3 kWp
Total number of PV modules:	26
Number of inverters:	1
Max. DC power ($\cos \phi = 1.0$) :	20 kW
Max. AC active power ($\cos \phi = 1.0$) :	11 kW
Grid AC voltage range:	380/400 V
Nominal power ratio:	130% ✓
Displacement Power Factor cos:	1



X3-MIC-10K-G2

PV

input 1: PV module1

13 x LONGi Solar, , Azimuth: 353 ° , Inclination: 10 °

input 2: PV module1

13 x LONGi Solar, , Azimuth: 353 ° , Inclination: 10 °

input1 PV module1


:

Number of strings:	1	
PV modules per string:	13	
Peak power (input):	7.15 kWp	
Typical PV voltage:	504V	✓
Min. PV voltage:	468 V	✓
Min. DC voltage:	504V	
Max. PV voltage:	707 V	✓
Max. DC voltage (PV):	540 V	
Max. current of PV array:	13.24 A	✓
Max. DC current:	13.24 A	

input2 PV module1

:

Number of strings:	1	
PV modules per string:	13	
Peak power (input):	7.15 kWp	
Typical PV voltage:	504V	✓
Min. PV voltage:	468 V	✓
Min. DC voltage:	504V	
Max. PV voltage:	707 V	✓
Max. DC voltage (PV):	540 V	
Max. current of PV array:	13.24 A	✓
Max. DC current:	13.24 A	

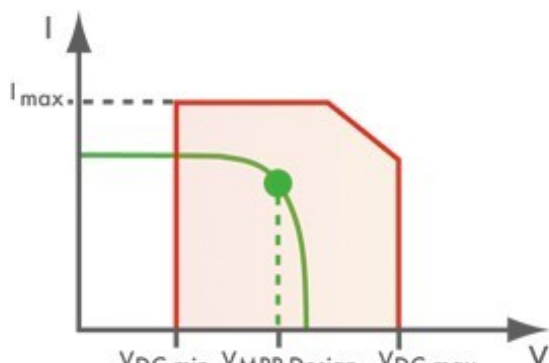

Equipment list:

inverter:	X3-MIC-10K-G2 x 1	PV/Inverter compatible
DC MPPT1 Cross section per string/DC:	10mm ²	
DC MPPT2 Cross section per string/DC:	10mm ²	
DC MPPT1 Cable Diameter AC Cable Diameter:	3.57mm	
DC MPPT2 Cable Diameter AC Cable Diameter:	3.57mm	
pv modules:	PV module1 x 26	
DC Cable Length:	40 m	
AC Cable Length:	10 m	

Information

✓	ZS Bohusovice
✓	1 X X3-MIC-10K-G2